
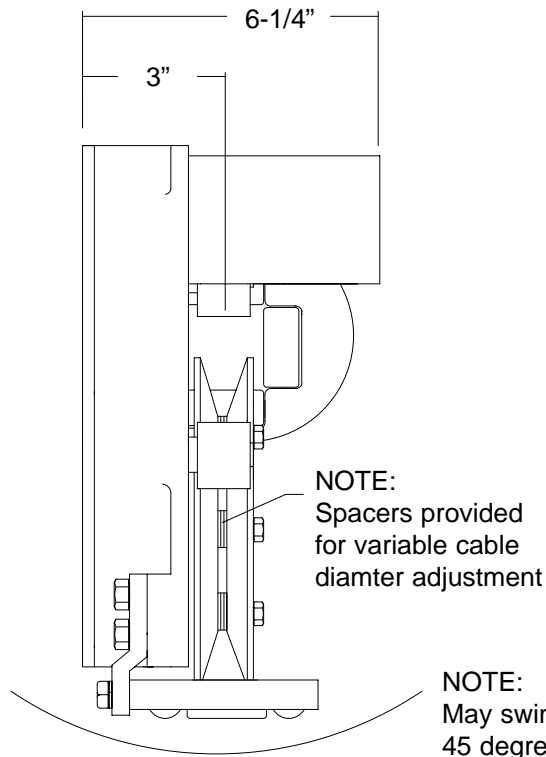



CM-7 RV-CABLEMASTER DIMENSIONS

SPECIFICATIONS:

Voltage:	12 VDC (24/32v DC available)
Amperage:	7-9 amps under load
Weight:	22 lbs.
Capacity:	adj. from 7/8" to 1-1/4" dia. cable - 50 amp 220v cable
Length of cable:	determined by available storage space

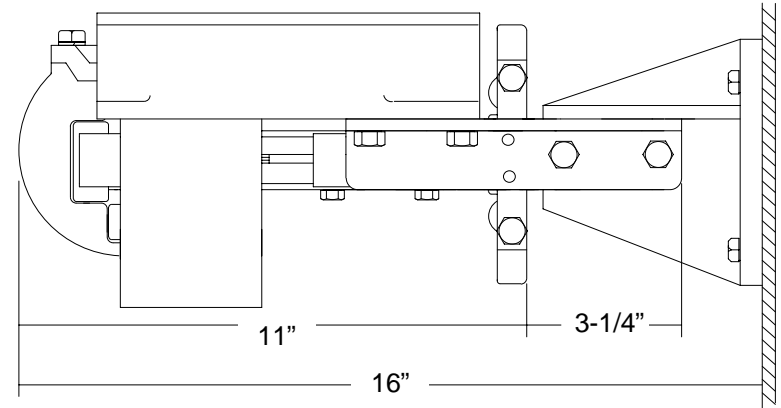


NOTE:
May swing up to 45 degrees

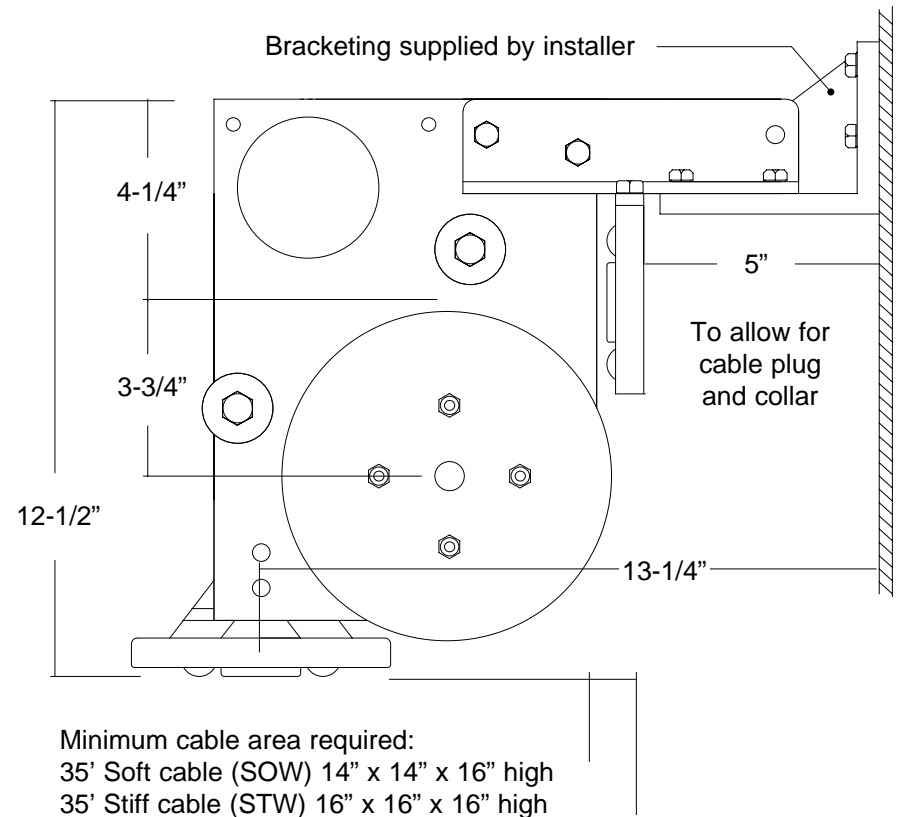


Minimum cable area required:
35' Soft cable (SOW) 14" x 14" x 16" high
35' Stiff cable (STW) 16" x 16" x 16" high

SAMPLE RV INSTALLATIONS


Remote Installation
(TOP VIEW)

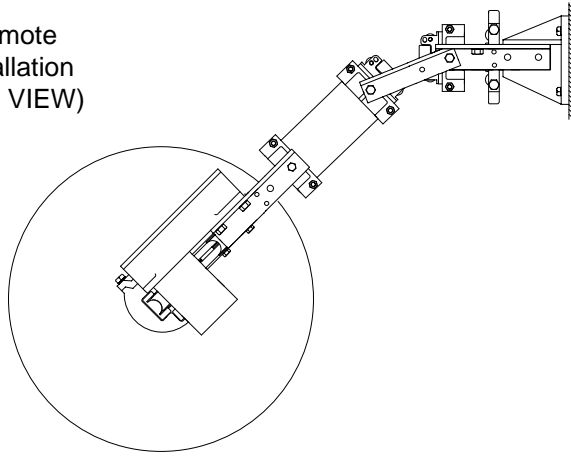


Unit Swiveled
(REAR VIEW)

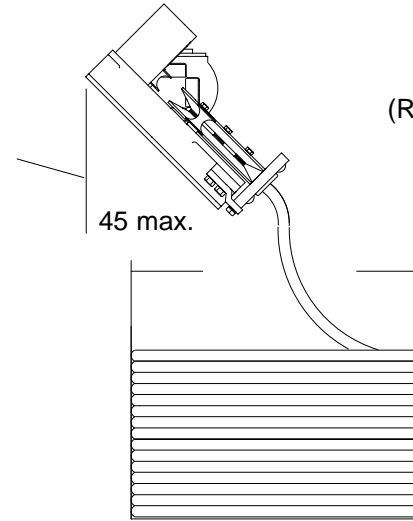

Standard Installation
(SIDE VIEW)

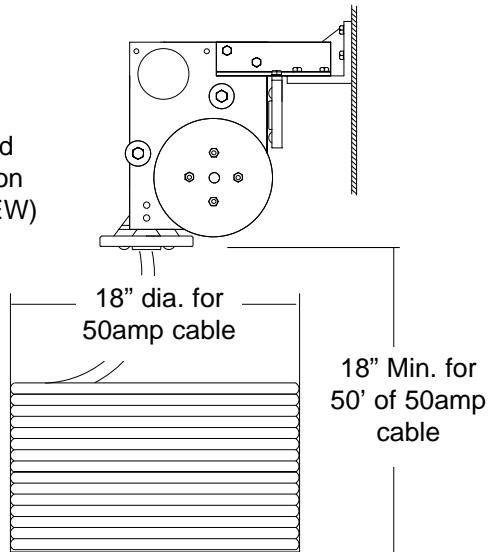

Remote Installation
(SIDE VIEW)

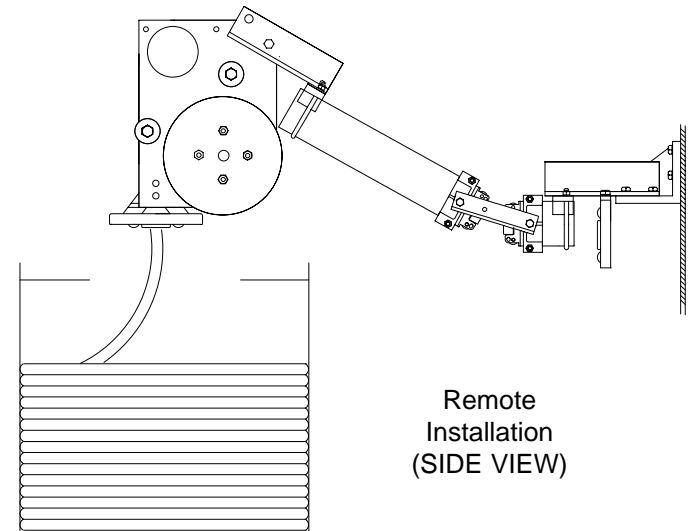

GLENDINNING
MARINE PRODUCTS

Custom Marine Services
Dist Elec Marine Parts

Ph: 800-992-7922
Fax: 800-992-7923

Website: www.cmsquick.com
E-Mail: sales@cmsquick.com