TG/LTG-Series Rocker Switches

The TG-Series Mini Tippette rocker switches are single or double pole and feature an all nylon double-insulated construction. These switches are designed with snap-in mounting for fast, low cost assembly. The illuminated version (LTG) is available with either a paddle or rocker actuator. These AC rated switches are also suitable for low-voltage DC applications in a wide range of markets including Appliance, HVAC, Food service, and Transportation.

Dielectric Strength
UL/CSA:
1000V - live to dead metal parts
Electrical Life
50,000 cycles- maintained
25,000 cycles- momentary
Mechanical Life
100,000 cycles
Operating Temperature
32°F to 150°F (0°C to +65.6°C)





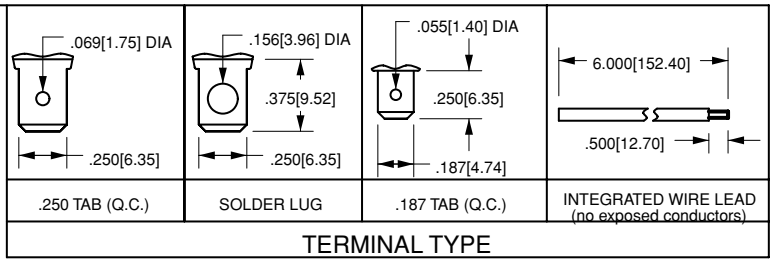



PADDLE



MOUNTING HOLE
Panel Thickness:
.030[.762] min. to
.250[6.35] max.

LTG	G	O	50	1	-	T	B	-	B	-	R	/	125N
1 Base Part Number	*2 Circuit*	*3 Center Position*	*4 Rating*	*5 Termination*		*6 Actuator Style*	*7 Actuator Color*		*8 Base Color*		*9 Lens Color*		*10 Lamp Voltage*

1 BASE PART NUMBER: SERIES[1]
TG Double Pole, Non-Lighted
LTG Double Pole with Indicator Lights

2 CIRCUIT
See Circuit Designation Chart Page 17.

3 CENTER POSITION
C Center OFF, Three position
O No Center OFF, Two position

4 RATING
40 5A 250VAC, 10A 125VAC, 1/2HP 125-250VAC
41 5A 250VAC, 10A 125VAC
50 10A 250VAC, 15A 125VAC, 3/4HP 125-250VAC
51 10A 250VAC, 15A 125VAC

5 TERMINATION/FUNCTION

	solder lug	*.250 tab QC*	*.187 tab QC*	*wire leads*
ON-NONE-OFF	**0**	**1**	**3**	**5**
(ON)-NONE-OFF	**A**	**B**	**D**	**F**
ON-NONE-(OFF)	**L**	**M**	**R**	**T**
ON-NONE-ON	**0**	**1**	**3**	**5**
ON-NONE-(ON)	**A**	**B**	**D**	**F**
ON-OFF-ON	**0**	**1**	**3**	**5**

6 ACTUATOR STYLE
P paddle **T** rocker

7 ACTUATOR COLOR[2]
B black **W** white

8 BASE COLOR[2]
B black **W** white

9 LENS COLOR[3]
A amber **C** clear **R** red

10 LAMP VOLTAGE
incandescent
6V 6 volt
12V 12 volt
18V 18 volt
24V 24 volt
28V 28 volt

neon
125N 125 volt neon
250N 250 volt neon

NOTES
Imprinting is available. Consult factory.
Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.
1 TG available with circuits A, B, C, D, E, F ; LTG available with circuits G, H, I, J, M, N, P, Q, R, T, U, V, Y, Z. See page 17.
2 Custom colors are available. Consult factory.
3 Specify lens color for LTG-Series only.
( ) Indicates momentary function.

www.cmsquick.com